

NXG DATA SHEET / DRILLING TOOLS /  
HOLE CLEANING SUB



## HOLE CLEANING SUB


**OUR PATENTED-DESIGN HOLE  
CLEANING SUB IS A PERFECT EXAMPLE  
OF NXG'S IDEAS IN ACTION – TO  
BENEFIT YOUR DRILLING OPERATIONS.**

A durable tool that is located between stands of drill pipe to redistribute cuttings that settle out of the mud on the low side of the wellbore, it comes into its own in highly deviated sections – in excess of 40°– where the build-up of cuttings beds is often most acute.

CFD analysis has already shown that its innovative design is capable of delivering a clear increase in cuttings removal, over longer periods, compared to a drill string without any mechanical aid.



# DEVELOPED TO OVERCOME THE TOUGHEST CHALLENGES

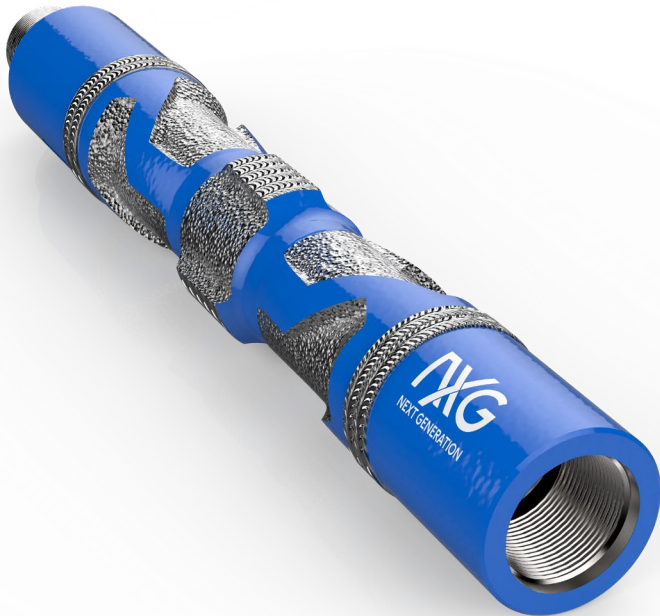

## KEY FEATURES

- Our patented impeller/ spade design for maximum cuttings agitation.
- Industry standard hard banding applications available to meet customers preferences.
- Placement programme for optimum hole cleaning performance on request.

## SPECIFICATION

(all sizes in inches unless otherwise specified / other sizes available on request)

Tool Series No	Tool Joint OD	Tool ID	Tool Length Sh-Sh	Standard Connection
NXG-HC-3500	5	2-9/16	55	NC38
NNXG-HC-4000	5-1/4	2-13/16	55	NC40 / 4 FH
NXG-HC-5000	6-5/8	2-13/16	55	NC50
NXG-HC-5500	7-1/4	3-1/4	55	5-1/2 FH
NXG-HC-6625	8-1/2	4-1/4	55	6-5/8 FH

Customer specified API and premium double shoulder and high torque connections available on request.

WANT MORE INFORMATION ON OUR HOLE CLEANING SUB?  
VISIT [WWW.NXG-GROUP.COM](http://WWW.NXG-GROUP.COM) OR EMAIL US AT [INFO@NXG-GROUP.COM](mailto:INFO@NXG-GROUP.COM)